

Gatorwall

Gatorwall is a multipurpose presentation wallcovering that combines the features of a high-quality projection screen with the advantages of a large, virtually seamless writing surface. Engineered with "bi-directional" embossed vinyl, **Gatorwall** provides superior projection and wide-angle viewing with virtually no image falloff. A dry erase film enables the use of dry erase markers. The **Gatorwall** surface is designed to be used as a projection surface the majority of the time with the ability to function as a dry erase surface when needed.

Features...

- High-quality projection surface that can serve as a large, seamless writing surface.
- Stain-resistant/graffiti proof projection surface.
- Comes in flexible rolls and installs like most commercial wallcoverings.
- Creates virtually seamless wall-to-wall and floor-to-ceiling presentation surfaces, even on curved walls.
- Makes presentation surfaces fully-accessible/ADA compliant. (floor to ceiling)

Applied in the same fashion as standard commercial wallcovering, **Gatorwall** can be hung on any clean, smooth, sealed surface. Wallcovering-backed **Gatorwall** can be applied using a heavy-duty wallcovering adhesive.

Horizontal seams are recommended when using **Gatorwall** roll vinyl, although vertical seams may be used. For virtually invisible seams, all seams must be double-cut and all vinyl should be railroded (reverse roll direction) to ensure color matching.

Gatorwall should be washed with an ammonia or alcohol-based cleaner or mild soap and rinsed thoroughly with water prior to using. Contact **AVRover** for more detailed installation instructions.

Physical Properties


	U.S. Units	Metric Units
Total Weight	18 oz./yd ²	0.610 kg/m ²
Fabric Weight	1.8 oz./yd ²	0.061 kg/m ²
Vinyl Weight	12 oz./yd ²	0.407 kg/m ²
Roll Width	49/50"	124/127 cm
	59/60"	150/152 cm
Laminate Thickness	17 mils (avg.)	0.43 mm (avg.)
Tensile (warp x fill)	75 x 75 lbs.	334 x 334 newton

Elmendorf Tear: 30 x 18 scale (avg.)

Fabric: Non-Woven

Flammability Testing Class A*: Pass

*Tested to ASTM E-84 applied to Glass Reinforced Cement Board.

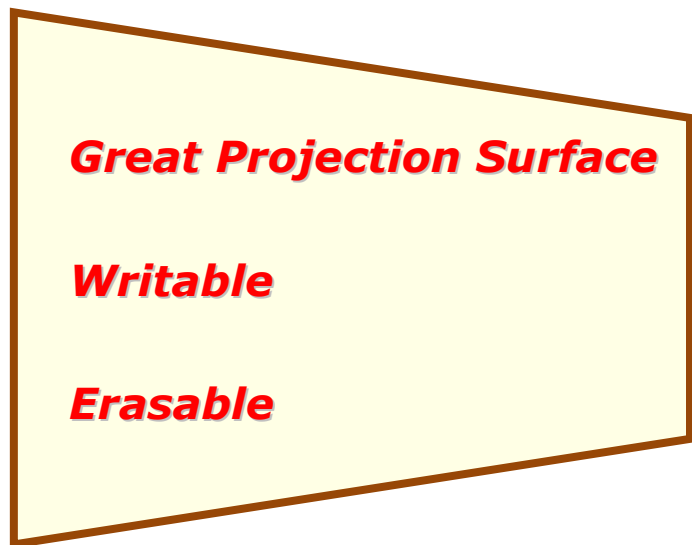

Product Name	Color	Use	Surface Gloss	Backing
Gatorwall	matte white	projection screen/dry erase writing	minimal	non-woven